

SP-321V

Optional Accessory Speakers for LDT321V LCD Monitor

Part Number	SP-321V (designed for LDT321V)
Frequency Response	100Hz – 20kHz
Power	7W + 7W @ 8 ohms with 10% THD
Dimensions (WxHxD)	2.9" x 18.75" x 3.3" 73.6 x 476 x 83.82mm
Weight	2.0 lbs (net)
Contents	Speakers (2), Speaker wire (2), Mounting brackets (4), Speaker screws (12), Quick Start Guide

Follow these steps to connect the speakers to your LCD monitor:

1. Turn off the power switch on the LCD.
2. Screw appropriate mounting brackets into the appropriate position on each speaker (2 brackets per speaker) using black screws. Figure 1. (2 screws per bracket.)
3. Screw mounting brackets / speakers to the LCD using one (1) black screw per bracket. Figure 2.
4. Once both speakers are attached to the LCD, connect the speaker wires to the terminals on the LCD and then to the terminals on attached speakers. Figure 3.
5. Turn the LCD power on.

Figure 1




Figure 2






Figure 3

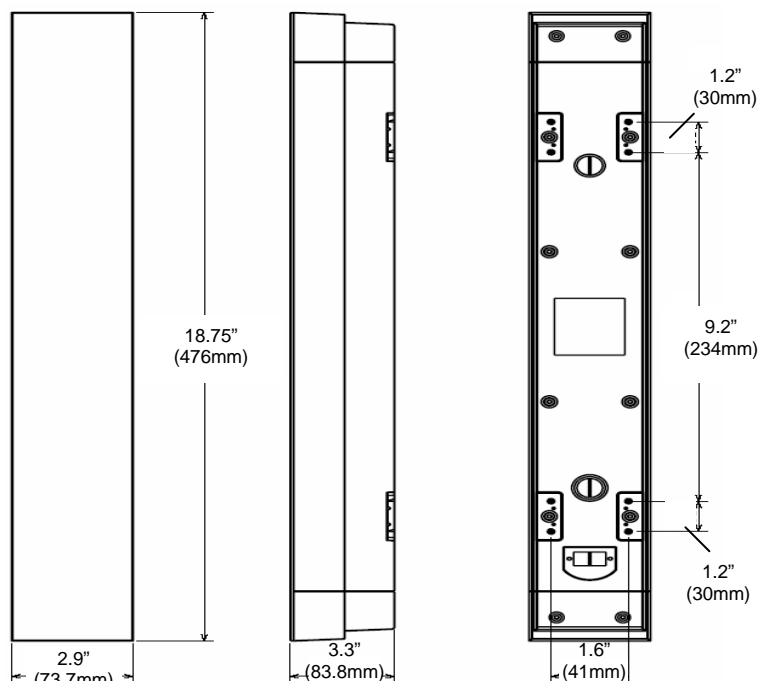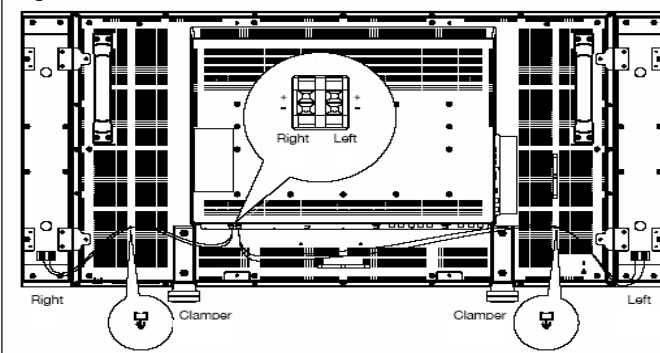

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
Presentation Products Division
Toll Free: 888.307.03479
Email: ppdinfo@mdea.com
www.mitsubishi-presentations.com

Canada
Mitsubishi Electric Sales Canada Inc.
Information Technologies
Phone: 905.475.7728
✉: tsupport@mdea.me.com
www.mitsubishielectric.ca

©2007 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. All trademarks are the property of their respective holders.